

# CROCHETS

## DISPOSITIFS D'OUVERTURE DE MOULE


| 2020



**STAVEM**  
À LA CONQUÊTE DE VOS PROJETS




# Crochets standards

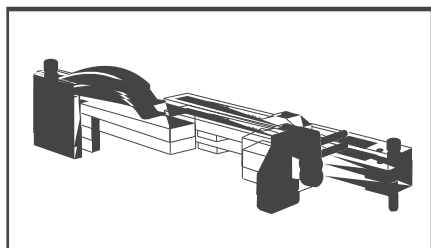


Dispositifs d'ouverture LECOL



Dispositifs d'ouverture ZH 90

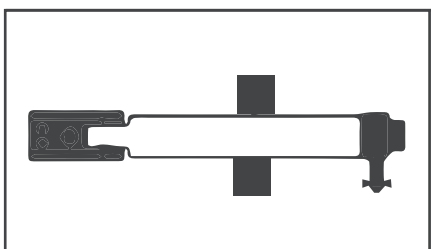


Dispositifs d'ouverture ZH91

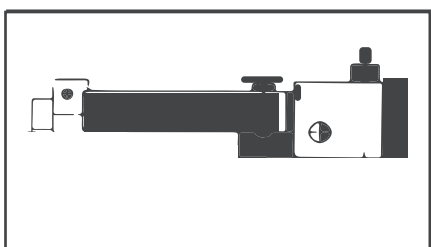


Dispositifs d'ouverture ZH13

# DISPOSITIF D'OUVERTURE LECOL

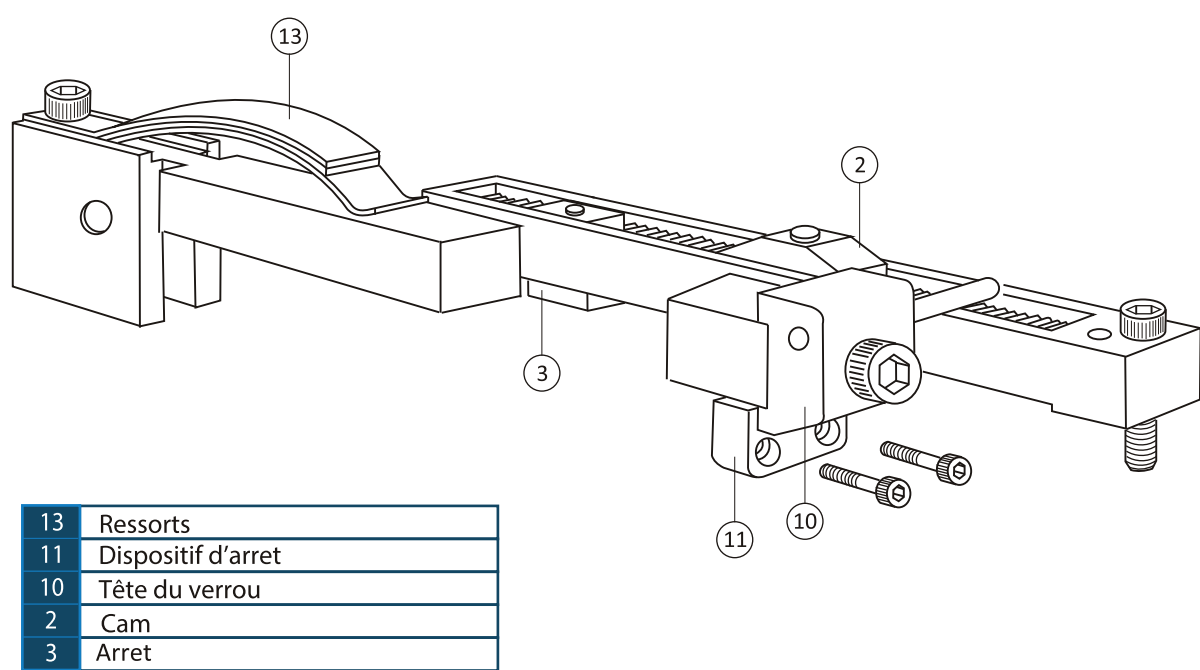


## NOUVELLE CAM POUR COUPLAGE / DECOUPLAGE

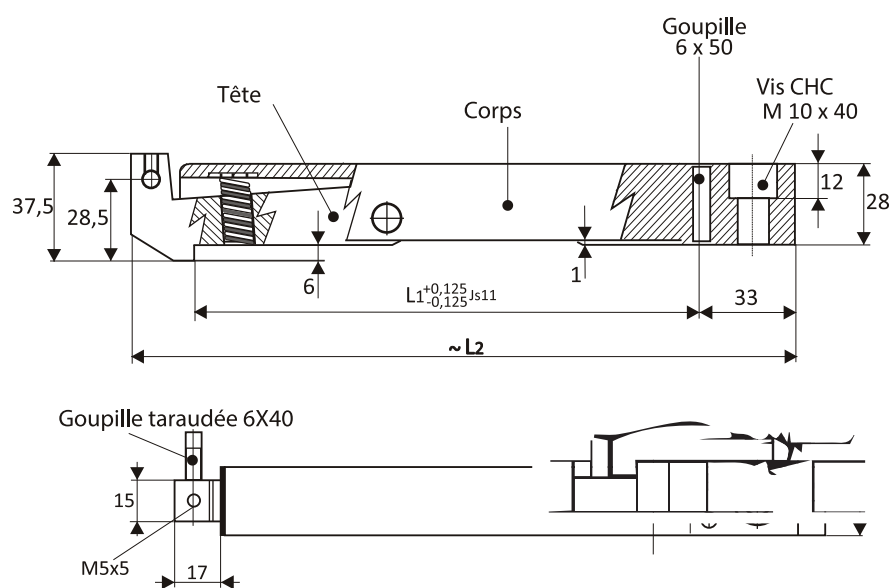


| REFERENCE | L1  | L2  |
|-----------|-----|-----|
| LECOL160N | 127 | 182 |
| LECOL185N | 152 | 207 |
| LECOL210N | 177 | 232 |
| LECOL235N | 202 | 257 |
| LECOL260N | 227 | 282 |

# DISPOSITIF D'OUVERTURE ZH90

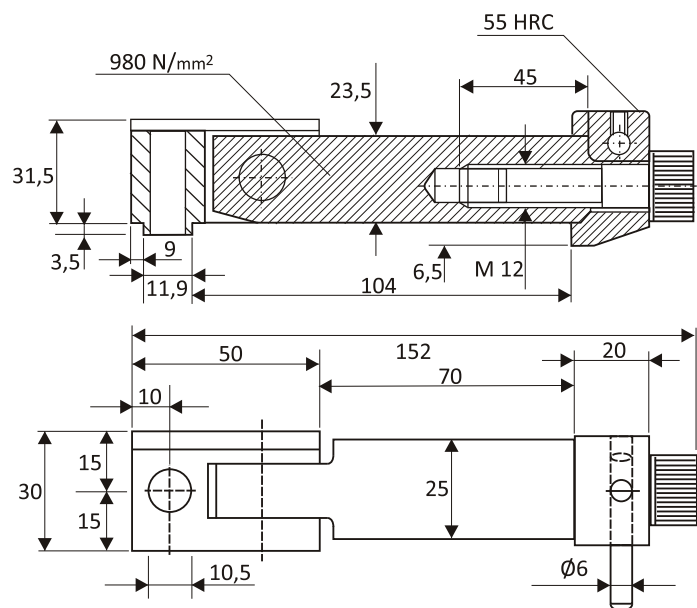


| TYPE | SERIE   | L   | L1 | FMAX (daN) |
|------|---------|-----|----|------------|
| 1    | ZH 90/1 | 152 | 70 | 4000       |

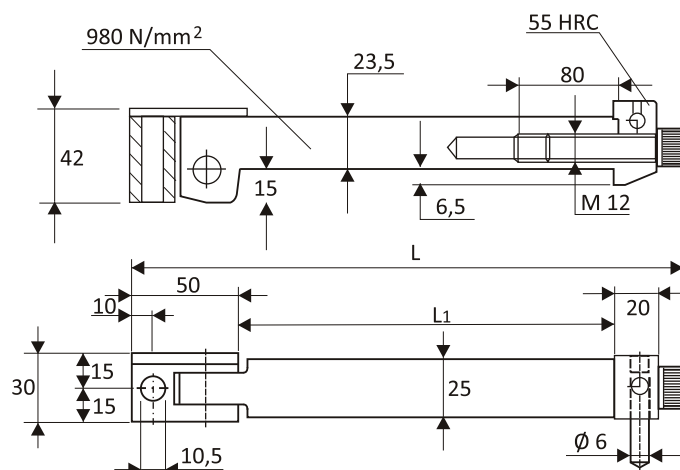


| TYPE  | SERIE       | L   | L1  | FMAX (daN) |
|-------|-------------|-----|-----|------------|
| 1 BIS | ZH 90/1 BIS | 172 | 90  | 6000       |
| 2     | ZH 90/2     | 252 | 170 | 6000       |
| 3     | ZH 90/3     | 302 | 220 | 6000       |
| 4     | ZH 90/4     | 352 | 270 | 6000       |

Fonctionne avec barre d'appui réglable ou fixe

## Barres d'appui

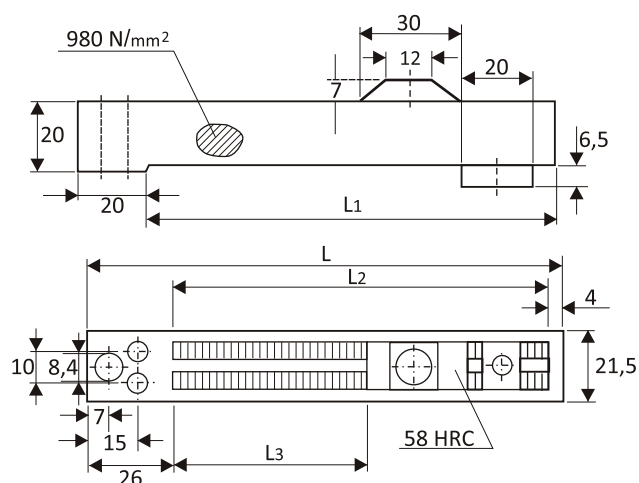


| TYPE | SERIE    | L   | L1  | L2  | L3 MAX. |
|------|----------|-----|-----|-----|---------|
| 01   | ZH 90/01 | 140 | 120 | 110 | 60      |
| 02   | ZH 90/02 | 204 | 184 | 174 | 124     |
| 06   | ZH 90/06 | 250 | 230 | 220 | 170     |

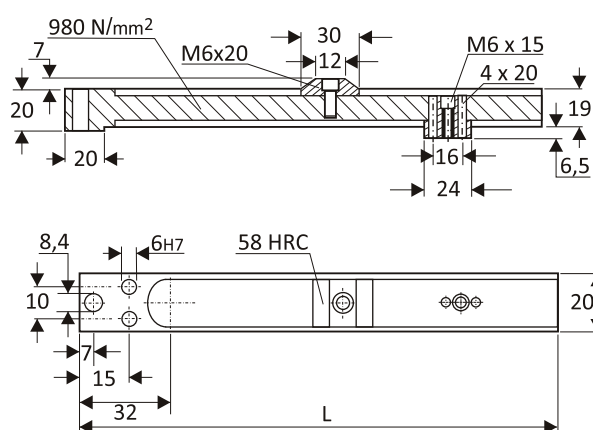

| TYPE | SERIE    | L   |
|------|----------|-----|
| 03   | ZH 90/03 | 200 |
| 04   | ZH 90/04 | 250 |
| 05   | ZH 90/05 | 300 |


# DISPOSITIF D'OUVERTURE ZH91

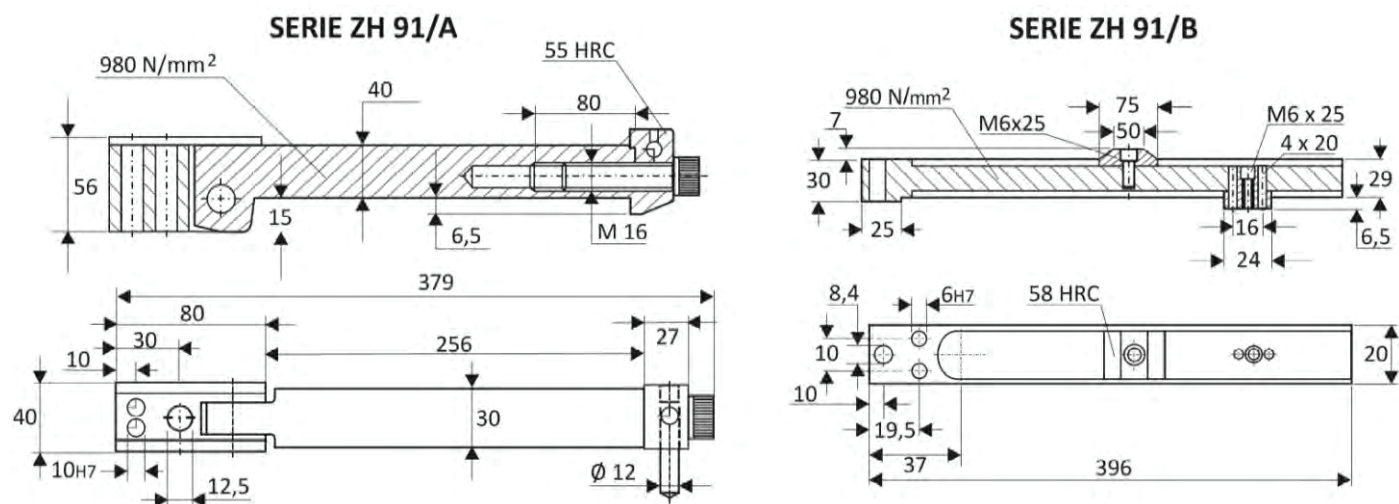


| TYPE | SERIE        |
|------|--------------|
| 2    | ZH 90/ 1     |
| 2    | ZH 90/ 01    |
| 2    | ZH 90/ 2     |
| 2    | ZH 90/ 02    |
| 2    | ZH 90/ 3     |
| 2    | ZH 90/ 03    |
| 2    | ZH 90/ 1 BIS |
| 2    | ZH 90/ 01    |

| TYPE | SERIE     |
|------|-----------|
| 2    | ZH 90/ 2  |
| 2    | ZH 90/ 03 |
| 2    | ZH 90/ 3  |
| 2    | ZH 90/ 04 |
| 2    | ZH 90/ 4  |
| 2    | ZH 90/ 05 |
| 2    | ZH 90/ A  |
| 2    | ZH 90/ B  |

## Assemblage standard

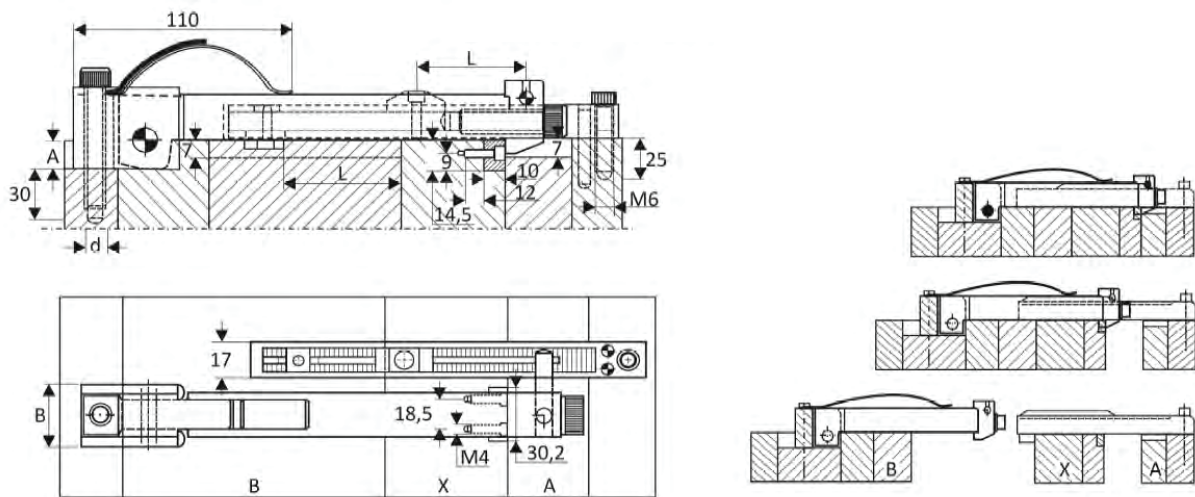

# DISPOSITIF D'OUVERTURE **ZH13**

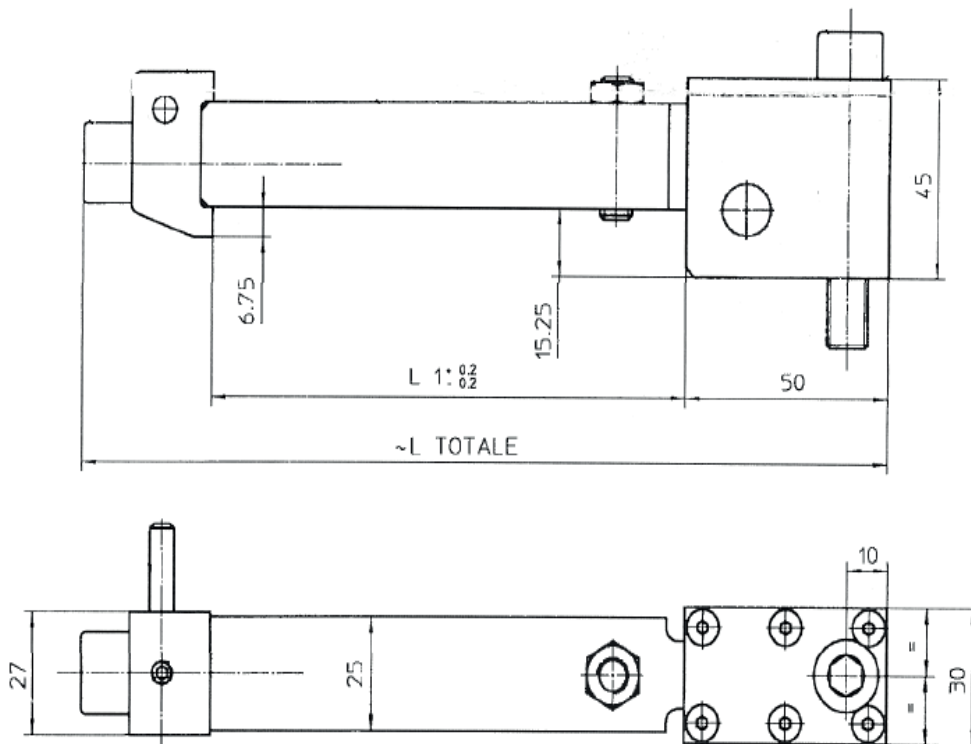

| Références  | L1  | L   |
|-------------|-----|-----|
| ZH 13 / 140 | 90  | 172 |
| ZH 13 / 200 | 170 | 252 |
| ZH 13 / 250 | 220 | 302 |

Fonctionne avec barres d'appui réglable ou fixe

A detailed 3D rendering of industrial mold components, including a large rectangular mold body with various slots and a smaller, more complex mold head with a cylindrical protrusion. The components are shown in a light gray, semi-transparent style, highlighting their geometric shapes and mechanical features.

# STAVEM

À LA CONQUÊTE DE VOS PROJETS

PARC INDUSTRIEL LA PRAIRIE  
01100 GROISSIAT

TEL: 04 74 73 00 33

FAX: 04 74 73 61 11

[WWW.STAVEM.COM](http://WWW.STAVEM.COM)  
[WWW.MOULDSHOP.FR](http://WWW.MOULDSHOP.FR)