




GOUPILLES, DIN 6325

Matière: 1.3505
Tolérance: M6
Dureté: 60 ± 2 HRC.

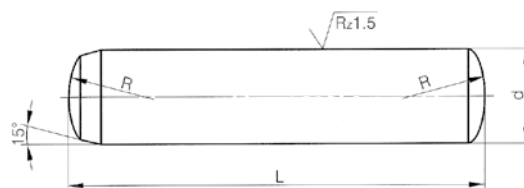

L \ d	2	3	4	5	6	8	10	12	14	16	20
6	.	.									
8	.	.	.	.	.						
10	.	.	.	.	.	.					
12	.	.	.	.	.	.	.				
14	.	.	.	.	.	.	.	.			
16	.	.	.	.	.	.	.	.	.		
18	.	.	.	.	.	.	.	.	.	.	
20	.	.	.	.	.	.	.	.	.	.	.
24	.	.	.	.	.	.	.	.	.	.	.
28	.	.	.	.	.	.	.	.	.	.	.
32	.	.	.	.	.	.	.	.	.	.	.
36	.	.	.	.	.	.	.	.	.	.	.
40	.	.	.	.	.	.	.	.	.	.	.
45	.	.	.	.	.	.	.	.	.	.	.
50	.	.	.	.	.	.	.	.	.	.	.
55	.	.	.	.	.	.	.	.	.	.	.
60	.	.	.	.	.	.	.	.	.	.	.
70	.	.	.	.	.	.	.	.	.	.	.
80	.	.	.	.	.	.	.	.	.	.	.
90	.	.	.	.	.	.	.	.	.	.	.
100	.	.	.	.	.	.	.	.	.	.	.
120	.	.	.	.	.	.	.	.	.	.	.
130	.	.	.	.	.	.	.	.	.	.	.
140	.	.	.	.	.	.	.	.	.	.	.
150	.	.	.	.	.	.	.	.	.	.	.

GO01+d+L ex. GO01 5-32 (5x32mm)