




## MANCHON DE GUIDAGE

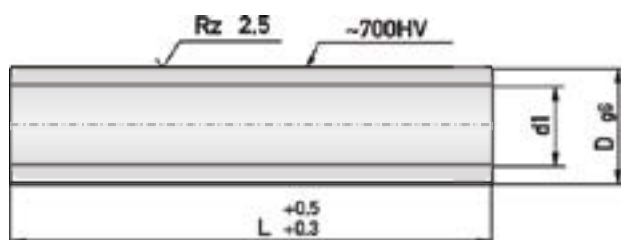

REF: M1060 - D - L

Matière: 1.7131 - Dureté: 61-63 HRC  
Interchangeable avec E1060

| d1   | D  | L   |
|------|----|-----|
| 6,2  | 10 | 20  |
|      |    | 30  |
|      |    | 40  |
|      |    | 50  |
|      |    | 60  |
|      |    | 70  |
|      |    | 80  |
|      |    | 100 |
|      |    | 120 |
|      |    | 140 |
| 8,51 | 4  | 30  |
|      |    | 40  |
|      |    | 50  |
|      |    | 60  |
|      |    | 70  |
|      |    | 80  |
|      |    | 100 |
|      |    | 120 |
|      |    | 140 |
|      |    | 160 |
| 10,5 | 18 | 180 |
|      |    | 40  |
|      |    | 60  |
|      |    | 80  |
|      |    | 100 |
|      |    | 120 |
|      |    | 140 |

| d1   | D  | L   |
|------|----|-----|
| 10,5 | 18 | 160 |
|      |    | 180 |
|      |    | 200 |
|      |    | 220 |
|      |    | 240 |
|      |    | 260 |
| 13   | 24 | 60  |
|      |    | 80  |
|      |    | 100 |
|      |    | 120 |
|      |    | 140 |
|      |    | 160 |
| 17   | 30 | 180 |
|      |    | 200 |
|      |    | 220 |
|      |    | 240 |
|      |    | 260 |
|      |    | 280 |
|      |    | 300 |
|      |    | 80  |
|      |    | 100 |
|      |    | 120 |
|      |    | 140 |
|      |    | 160 |