




EJECTEUR CUIVRE SANS BERYLLIUM TYPE A

Suivant norme DIN ISO 6751

Mat.: Alliage de cuivre
Sans béryllium
Tête: 180 HB
Corps: 180 HB
Conductivité thermique: 180 - 208 W/m°K

Z6103- d1 - 11

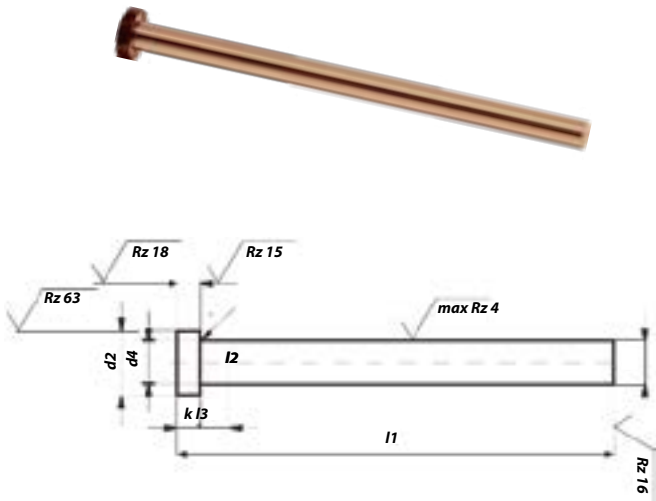

d ₁	d ₂	d ₄	kr	r	l ₁						l ₃	
	00		0	0,20	2							
g 6–	- 0,2		– 0,05	01	100	160	200	250	315	400	500	ca.
2.4		d ₁ + 0,03	2	0,2								5
2,5	5			0,3								
2,7												
3												
3,2	6											
3,5					7							
3,7												
4	8											
4,2												
4,5												
51	0											
6	12											
6,2			5		0,5							
7												
8												
8,2												
10	16											
12	18											
14	22	d ₁ + 0,04	7	0,8								
16												

* AUTRES DIMENSIONS SUR DEMANDE